


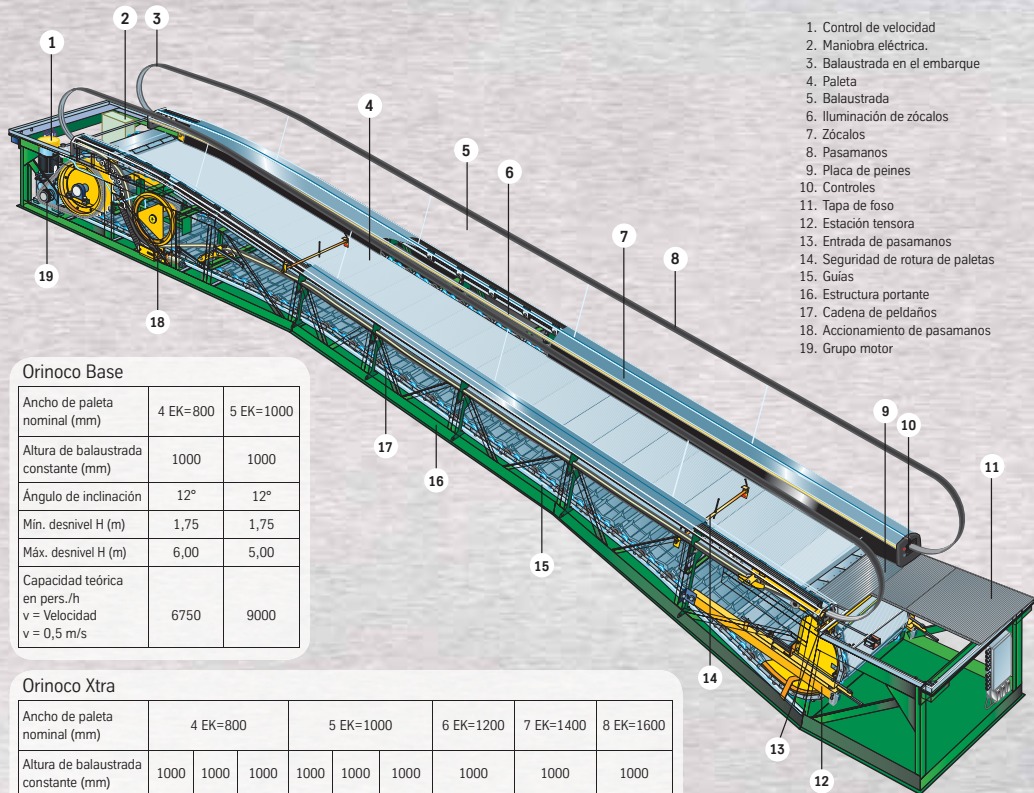

Orinoco Base

Ancho de paleta nominal (mm)	4 EK=800	5 EK=1000
Altura de balastrada constante (mm)	1000	1000
Ángulo de inclinación	12°	12°
Min. desnivel H (m)	1,75	1,75
Máx. desnivel H (m)	6,00	5,00
Capacidad teórica en pers./h v = Velocidad v = 0,5 m/s	6750	9000

Orinoco Xtra

Ancho de paleta nominal (mm)	4 EK=800			5 EK=1000			6 EK=1200	7 EK=1400	8 EK=1600
Altura de balastrada constante (mm)	1000	1000	1000	1000	1000	1000	1000	1000	1000
Ángulo de inclinación	0°	10°	12°	0°	10°	12°	0°	0°	0°
Máx. longitud L (m)	200	*	*	175	*	*	150	130	115
Máx. desnivel H (m)	*	9	9	*	8	8	*	*	*
Capacidad teórica en pers./h v = Velocidad v = 0,5 m/s v = 0,65 m/s	6750 8775			9000 11700			11250 14625	13500 17550	15750 20475

